

SHENGXIN FENCE PRODUCTS

Barbed Wire & Razor Barbed Wire



High quality low carbon steel wire, (galvanized, plastic coated, plastic sprayed) PVC wire, with the colors of blue, green and yellow, etc. Galvanized Barbed Iron Wire in IOWA type, with 2 strands, 4 points. Barbs' distance 3-6 inches (Tolerance $\pm 1/2"$). Galvanized Barbed Iron Wire offered by us is suitable for industry, agriculture, animal husbandry, dwelling house, plantation or fencing.



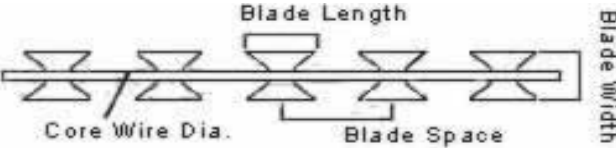

barbed Wire

	Gauge of Strand and Barb in B.W.G.	Approximate Length per Kilo in Meter			
		Barbs Spacing 3"	Barbs Spacing 4"	Barbs Spacing 5"	Barbs Spacing 6"
Barbed Wire	12x12	6.0617	6.7590	7.2700	7.6376
	12x14	7.3335	7.9051	8.3015	8.5741
	12-1/2x12-1/2	6.9223	7.7190	8.3022	8.7221
	12-1/2x14	8.1096	8.814	9.2242	9.5620
	13x13	7.9808	8.899	9.5721	10.0553
	13x14	8.8448	9.6899	10.2923	10.7146
	13-1/2x14	9.6079	10.6134	11.4705	11.8553
	14x14	10.4569	11.6590	12.5423	13.1752
	14-1/2x14-1/2	11.9875	13.3671	14.3781	15.1034
	15x15	13.8927	15.4942	16.6666	17.5070
	15-1/2x15-1/2	15.3491	17.1144	18.4060	19.3386





Razor barbed Wire

Razor Blade Specification						
Reference Number	Blade Style	Thickness	Wire Dia	Barb Length	Barb Width	Barb spacing
BTO-12		0.5 ± 0.05	2.5 ± 0.1	12 ± 1	13 ± 1	26 ± 1
BTO-18		0.5 ± 0.05	2.5 ± 0.1	18 ± 1	15 ± 1	33 ± 1
BTO-22		0.5 ± 0.05	2.5 ± 0.1	22 ± 1	15 ± 1	34 ± 1
CBT-65		0.6 ± 0.05	2.5 ± 0.1	65 ± 2	21 ± 1	100 ± 2



Razor Barbe Tape Wire Specification				
Outside Diameter	No. of Loops	Standard Length per Coil	Type	Notes
450mm	33	8M	CBT-65	Single coil
500mm	41	10M	CBT-65	Single coil
700mm	41	10M	CBT-65	Single coil
960mm	53	13M	CBT-65	Single coil
500mm	102	16M	BTO-10.15.22	Cross type
600mm	86	14M	BTO-10.15.22	Cross type
700mm	72	12M	BTO-10.15.22	Cross type
800mm	64	10M	BTO-10.15.22	Cross type
960mm	52	9M	BTO-10.15.22	Cross type



Anping ShengXin Metal Wire Mesh Fence Co.,Ltd

**www.metalwire-fence.com
www.wire-mesh-fence.net**

**Tel:+86-318-7795669 7795699 Fax: +86-318-7795878
sales@metalwire-fence.com**